


SECTION E–E




SECTION F–F

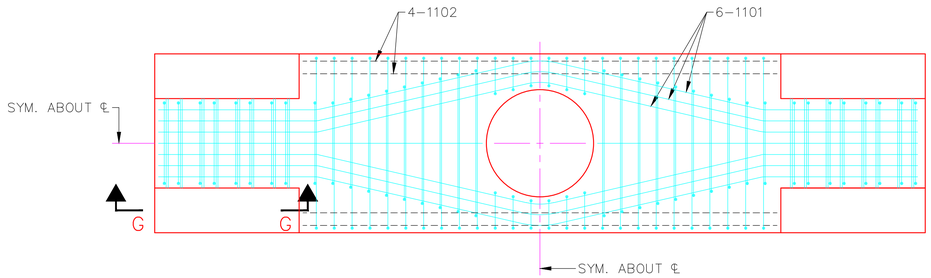


ELEVATION

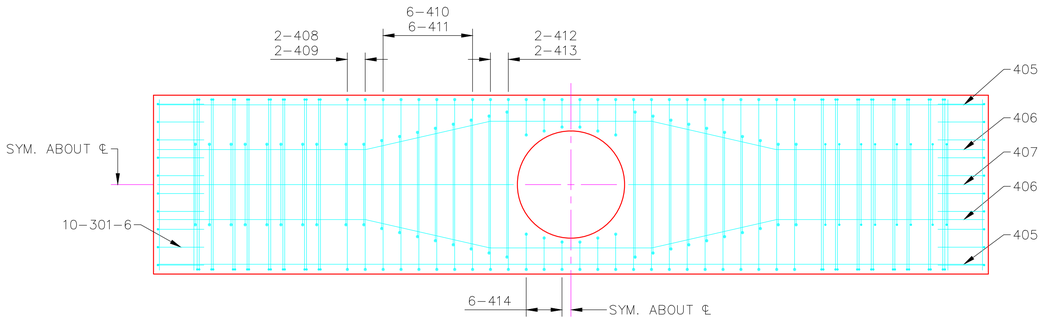


SECTION A–A

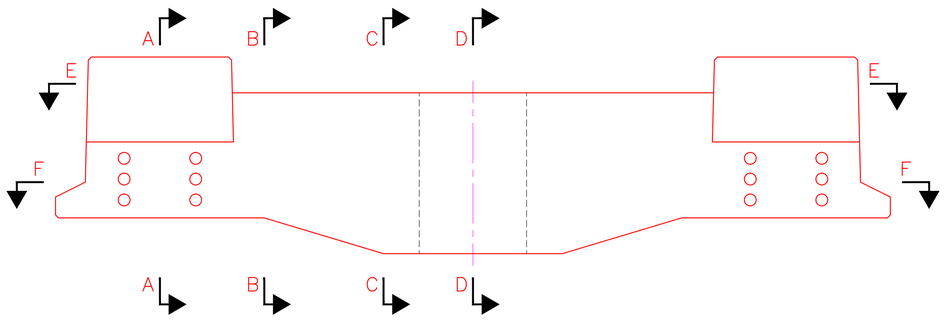


SECTION B–B

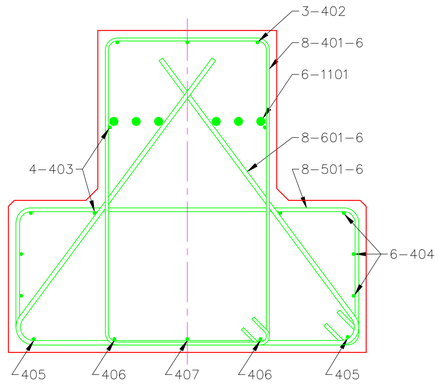


SECTION C–C

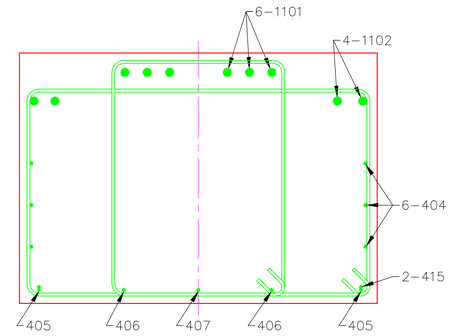


SECTION D–D

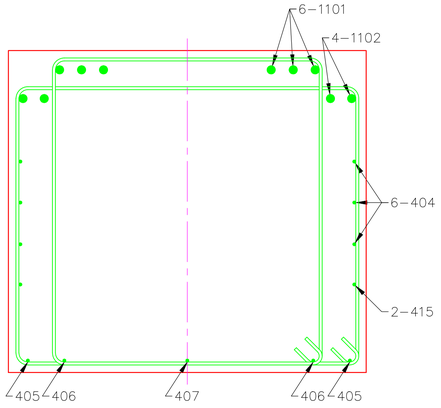


SECTION G–G

NOTES

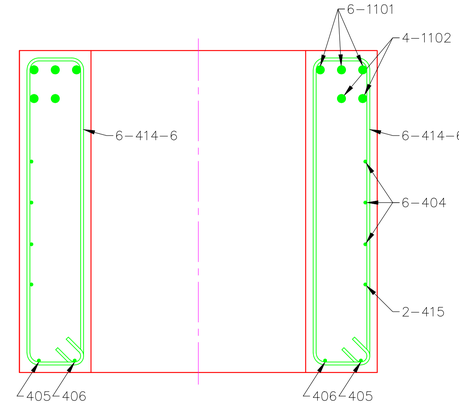CONCRETE

| CLASSES: | 28–DAY CYLINDER STRENGTH (P.S.I.) | MAXIMUM AGGREGATE SIZE (IN.) |
|---|---|---|
| PRECAST PIER CAPITALS | 6,000 | ¾ |

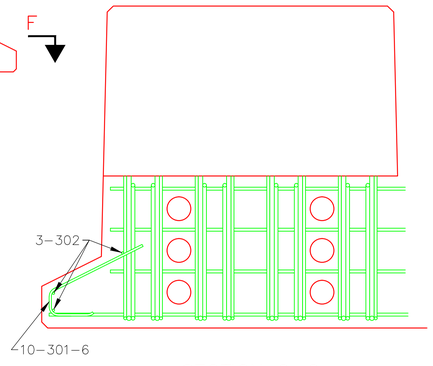REINFORCEMENT

GRADE:

AASHTO M31/ASTM A615 GRADE 60, DEFORMED BARS

COVER:

1¼ IN. UNLESS NOTED OTHERWISE

DIMENSIONING

ALL DIMENSIONS ARE GIVEN IN FEET AND INCHES UNLESS NOTED OTHERWISE

REINFORCING BAR DESIGNATION

88–1001–12

NUMBER OF BARS — BAR SPACING

BAR SIZE — DESIGNATION MARK

ABC NO: S10 DATE: 07/03/13


Andy's Best CAD
1323 Carlyle Park Circle
Highlands Ranch, CO 80129
303-808-3352
andysbestcad@yahoo.com
www.andysbestcad.com


ISSUE:

| NO: | DATE: | ISSUE: |
|---|---|---|

DRAWN: A.LANDT
DESIGNED:
CHECKED:
CLIENT JOB NO.:
DATE: 07/03/13
FILE: ABC–S10–124.dwg

DRAWING TITLE:

TYP TWIN TRACK GW PIER CAPITAL REINFORCEMENT

DRAWING NUMBER:

S10/124


©2013 ANDY'S BEST CAD, ALL RIGHTS RESERVED. THIS DRAWING IS THE PROPERTY OF ANDY'S BEST CAD AND IS PROTECTED BY COPYRIGHT LAWS OF THE UNITED STATES OF AMERICA. ANY UNAUTHORIZED USE OF THE INFORMATION CONTAINED HEREIN OR PART THEREOF IS STRICTLY PROHIBITED. ACCEPT OR POSSESSION THEREOF DOES NOT CONVEY OR TRANSFER ANY RIGHT TO MAKE, COPY, MANUFACTURE AND/OR SELL EITHER THE DRAWING OR THE ITEMS SHOWN THEREIN.