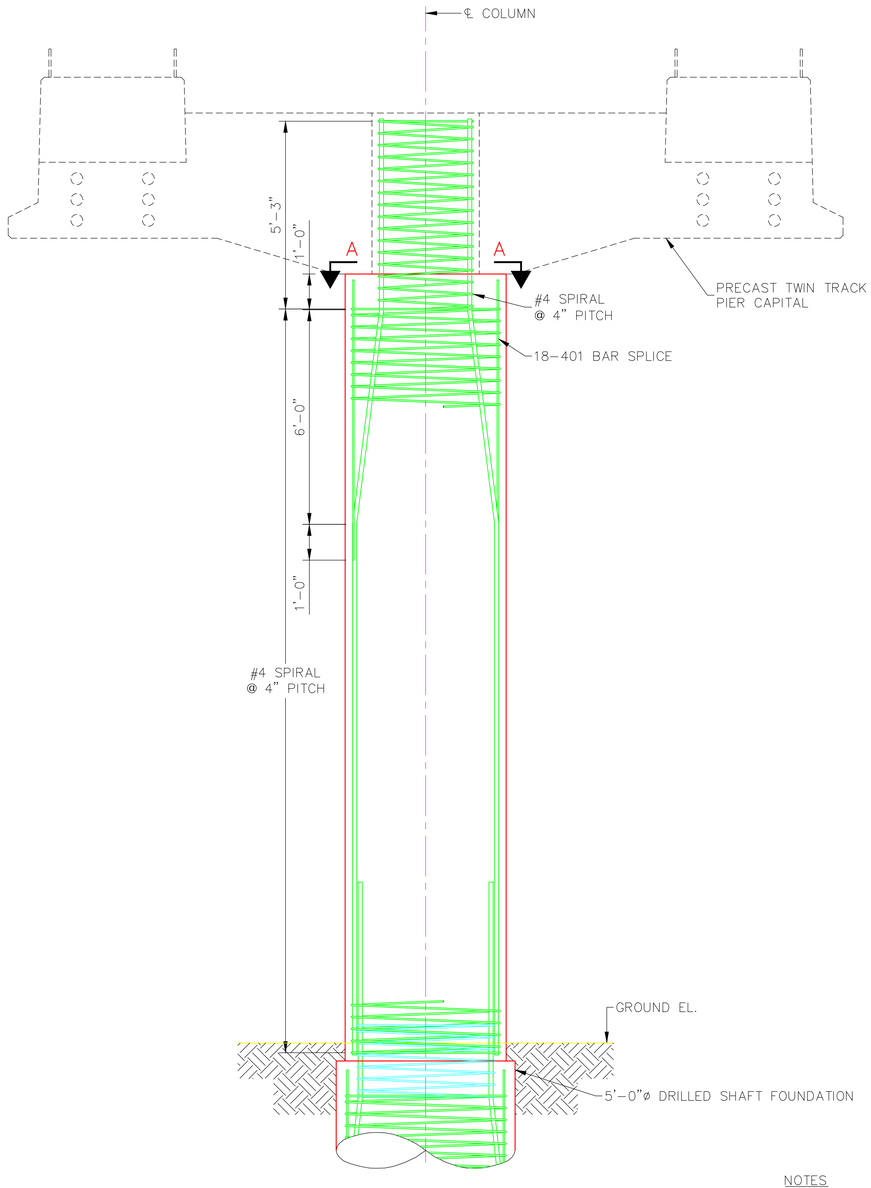

ELEVATION

TWIN TRACK GUIDEWAY
PIER COLUMN REINFORCEMENT

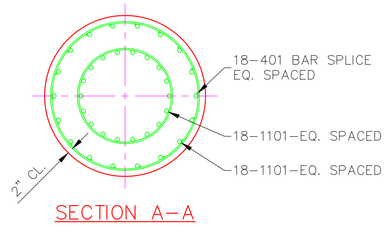

SECTION A-A

NOTES

CONCRETE

CLASSES:	28-DAY CYLINDER STRENGTH (P.S.I.)	MAXIMUM AGGREGATE SIZE (IN.)
CAST-IN-PLACE COLUMNS	4,000	1½
DRILLED SHAFT FOUNDATIONS	4,000	1½

REINFORCEMENT
GRADE:
AASHTO M31/ASTM A615 GRADE 60, DEFORMED BARS
COVER:
CAST-IN-PLACE COLUMNS: 2 IN. UNLESS NOTED OTHERWISE
DRILLED SHAFT FOUNDATIONS: 3 IN. UNLESS NOTED OTHERWISE

DIMENSIONING
ALL DIMENSIONS ARE GIVEN IN FEET AND INCHES UNLESS NOTED OTHERWISE

REINFORCING BAR DESIGNATION
88-1001-12
NUMBER OF BARS — BAR SPACING
BAR SIZE — DESIGNATION MARK

LINKS THE SAME SIZE AND SPACING OF THE SPECIFIED REBAR SPIRALS MAY BE SUBSTITUTED FOR THE SPIRALS AT THE DISCRETION OF THE CONTRACTOR

ABC NO: S10 DATE: 07/03/13

Andy's Best CAD
1323 Carlyle Park Circle
Highlands Ranch, CO 80129
303-808-3352
andysbestcad@yahoo.com
www.andysbestcad.com

ISSUE:

NO:	DATE:	ISSUE:

DRAWN: A.LANDT
DESIGNED:
CHECKED:
CLIENT JOB NO.:
DATE: 07/03/13
FILE: ABC-S10-130.dwg

DRAWING TITLE:
TYP TWIN TRACK GW PIER COLUMN REINFORCEMENT

DRAWING NUMBER:
S10/130

©2013 ANDY'S BEST CAD ALL RIGHTS RESERVED. THIS DRAWING IS THE PROPERTY OF ANDY'S BEST CAD AND IS PROTECTED BY COPYRIGHT LAWS OF THE UNITED STATES OF AMERICA. ANY UNAUTHORIZED USE OF THE INFORMATION CONTAINED HEREIN OR PART THEREOF IS STRICTLY PROHIBITED. RECOPY OR POSSESSION THEREOF DOES NOT CONVEY OR TRANSFER ANY RIGHT TO MAKE, COPY, MANUFACTURE AND/OR SELL EITHER THE DRAWING OR THE ITEMS SHOWN THEREIN.